


7. PIN LAYOUT & DESCRIPTION

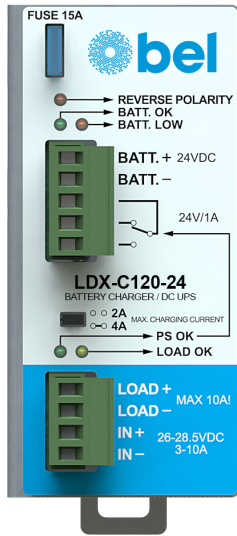

INPUT / OUTPUT CONNECTION	IN + = Positive DC (Power Supply)
	IN - = Negative DC (Power Supply)
	LOAD + = Positive DC
	LOAD - = Negative DC
	BATT.+ = Positive DC (Battery)
	BATT.- = Negative DC (Battery)
SIGNALLING	SPDT dry contact
	• NO
	• NC
	• COM

8. MECHANICAL DRAWING

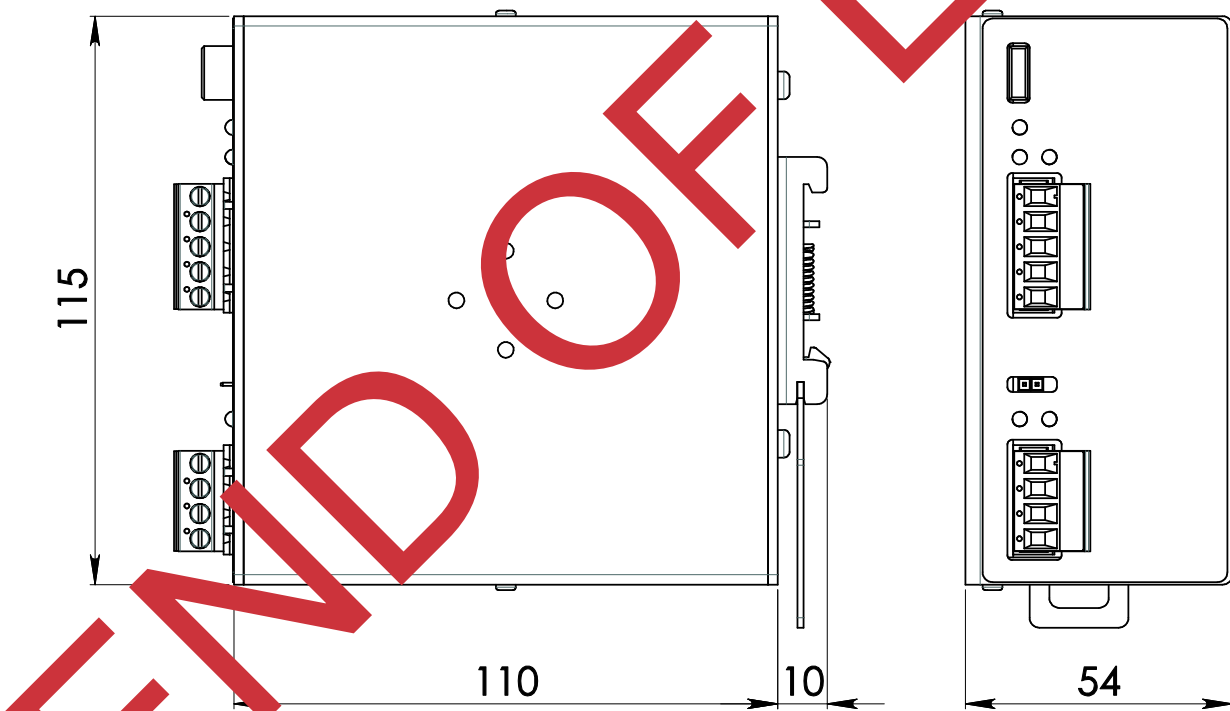


Figure 1. Mechanical Drawing

Notes:

Technical parameters are typical, measured in laboratory environment at 25°C, at nominal values, after minimum 5 minutes of operation. Power rating, losses, efficiency, ripple, thermal behaviour and start-up may change outside of the nominal rated input range. Contact factory for details.

NUCLEAR AND MEDICAL APPLICATIONS - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.

TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.



Asia-Pacific
+86 755 298 85888

EMEA
+353 61 49 8941

North America
+1 866 513 2839

belfuse.com/power-solutions